


# Self Contained Hydrostatic Test Units

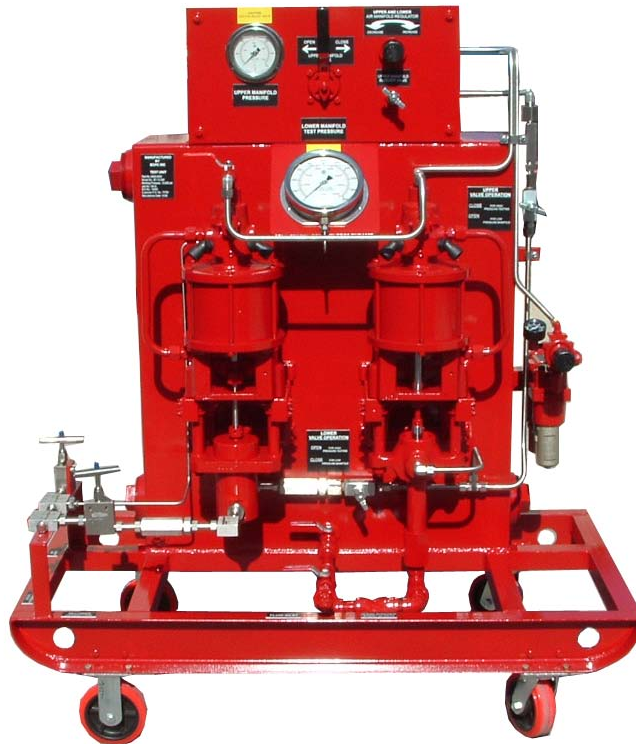

Self Contained units are available for when valves and preventers must be opened and closed during testing. They have a 50 gallon reservoir and ½" 4-way control valve.

## Dimensions

Length 60"    Width 48"    Height 56"    Approx. Weight 900 lbs.

## Specifications

Steel Skid and Tank Assembly (Heavy Duty)

1-7 3/8" High Pressure Pump Assembly 140: 1 Ratio (8 ½" on 30K)

.25 GPM to 20,000 psi W/125 psi air supply

1 – 7 3/8" Low Pressure Pump Assembly 60: 1 Ratio

3.9 GPM @ 1200 psi    3.6 GPM @ 2000 psi    3.2 GPM @ 3000 psi    W/125 PSI Air Supply

Autoclave style high pressure manifold, 9/16 MP fittings, 316 SS, 20,000 psi WP (10 & 15K Units)

6" SS Fluid Filled 30,000 psi Certified Gauge with ¼" HP bottom connection (20K on 10K Units)

Rupture Disk Safety Head (17,500 on 15K Unit, 12,500 on 10K Unit

approx.)

½" Air Regulator 0-160 PSI

½" Pre-Set Air Regulator to Limit System Maximum Pressure

½" Air Lubricator

## Stand Mounted Chart Recorders Available

10K    B-SSR-10  
15K    B-SSR-15  
20K    B-SSR-20  
30K    B-SSR-30

